

FS B001/FS B001C

3D Plantar Scanner

FSB001C
Comes with a vertical stand and
an all-in-one computer




Hardware

- Foot Plantar 3D with color in non/semi/full weight
- Foam Impression and Plaster Cast
- Laser 3D Scan 2.0s one-way
- Color texture 2.0s/4.9s for normal/high resolution
- High resolution color can match 2D office scanner
- PC Minimum CPU N100 8G RAM
- Integrated GPU OK; Min 1080P display
- Software UI or Foot switch to activate scan
- Clean 3D mesh, +/- 1.0mm accuracy
- Scan Volume 330L×140W×80H mm
- Size: 455L×212W×55H mm (FS B001)
- 852L×600W×1533H mm (FS B001C)
- Package Size: 51×29×24.5(FS B001) | 865×665×305mm(FS B001C)
- N.W.: 3.2kg (FS B001) | 23kg (FS B001C)
- G.W.: 5.2kg (FS B001) | 27kg (FS B001C)
- Load Capacity: 180 kg (397Lb)
- Power adapter AC 100-240V; DC 12V/3A



Software

- Win10/11, doesn't support Win7/8
- Auto analysis for arch type, bunion, and heel angle
- Auto tracking blue marker at 1st and 5th met points
- Auto tracking blue marker at 3 heel points
- Mark landmarks on foot then drag points to match
- PDF foot report with manual annotations
- Export to STL/WRL/OBJ/PLY/JPG/PNG/ PDF report, CSV data files
- FTP send order to shoe/insole fabrication
- User-define RX form for orthopedic shoe/insole
- Developers: CMD/TCP call scanner to receive data integration into your own CAD software and database
- Optional encrypt scanners to lock files

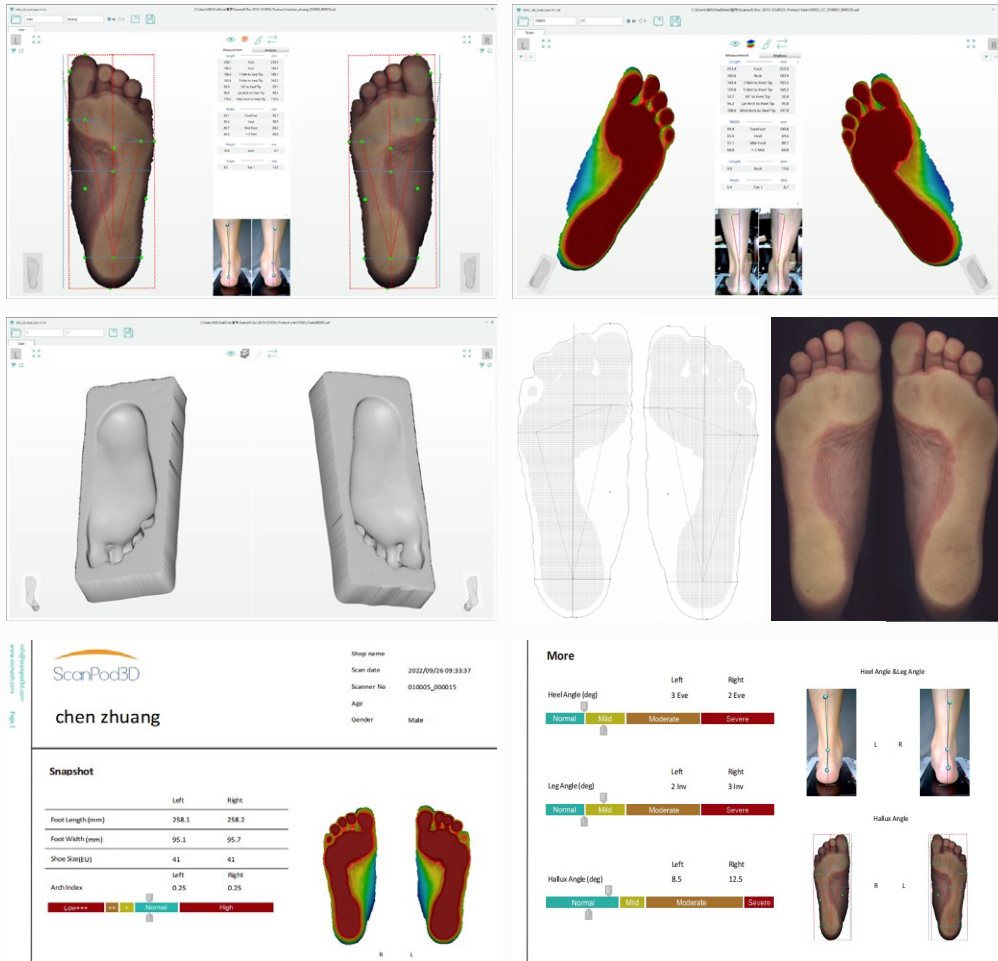

Easy to Carry

Optional Carrying Case: can fit the entire tandard, Floor, or Vertical (without the pedestal) inside.

