

FS B003/FS B003C

3D Full-Foot Scanner




XSOL Hardware

- Full-foot 3D with color in non/semi/full-weight
- Foam Impression scan
- High Speed 2.7s; Normal Speed 6.8s
- Minimum CPU i5-1240P 16G RAM
- Integrated GPU OK; Min 1080P display
- Software UI or Foot switch to activate scan
- Normal lighting, open top coverless scan
- Clean 3D mesh, +/- 1.0mm accuracy
- Scan Volume 330L X 130W X 115H mm
- Size: 475L X 255W X 216H mm (FS B003)
854L X 600W X 1543H mm (FS B003C)
- N.W.: 9.5kg (FS B003) | 25.5kg (FS B003C)
- G.W.: 11.5kg (FS B003) | 29.5kg (FS B003C)
- Load Capacity: 180 kg (397Lb)
- Power adapter AC 100-240V; DC 12V/3Ap



XSOL Software

- Win10/11, doesn't support Win7/8
- Auto 30 Landmark and 43 Measurements
- Auto analysis for arch type, bunion, and heel angle
- Mark landmarks on foot then drag points to match
- PDF Foot report with manual annotations
- FTP send order to shoe/insole fabrication
- 3D format STL/WRL/OBJ/PLY, 2D format JPG/PNG, PDF report, CSV data file
- User-define RX form for orthopedic shoe/insole
- Developers: CMD/EXE call scanner to receive data integration into your own CAD software and database
- Optional encrypt scanners to lock files

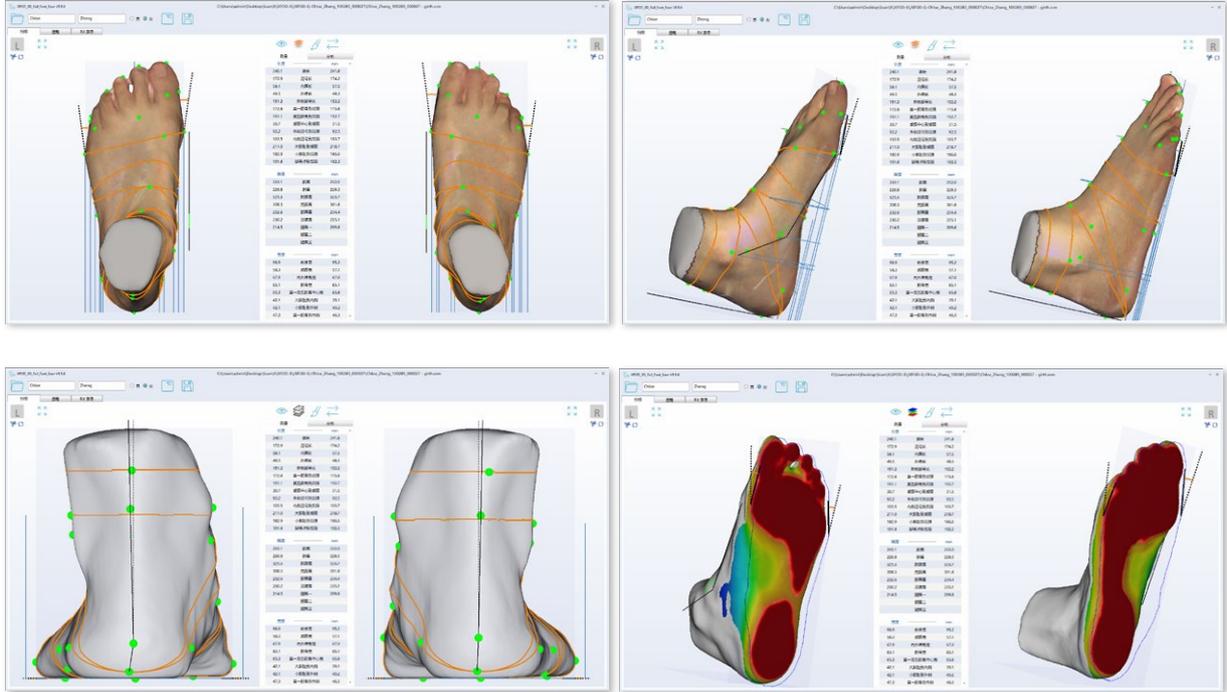

	左	右
脚长 (mm)	240.1	241.8
脚宽 (mm)	96.9	95.2
跖围 (mm)	233.1	232.0
脚类型	Egyptian	Egyptian
鞋码 (EU)	38.5	39.0
鞋宽 (EU)	G	G

A — B — C — D — E — F — G



Standard Configuration

- Scanner, USB cable (with two red USB plugs), power adapter, foot switch, side pedals (two)
- Customer to provide: Laptop or desktop computer, monitor, keyboard, mouse.
- Optional: Hard-shell trolley case. Note: Shipping costs for transporting the scanner inside the trolley case (adding dead weight) are higher than shipping it in a cardboard box. Shipping the trolley case separately will incur corresponding freight charges.

